

### 特 長

- 空気焼入れ（衝風焼入れ）が可能な合金工具鋼です。
- 汎用合金工具鋼（SKS3）と同等の 850℃ 程度で焼入れが可能です。
- 耐摩耗性は SKS3 よりも優れています。  
※ SKD11 には劣ります。
- 被削性は SKS3 とほぼ同じです。


### 硬 さ

納入時            235HB 以下  
焼入焼戻し後    58 ～ 62HRC

### テクニカルデータ

206 ～ 210 ページをご覧ください。

### 精度規格

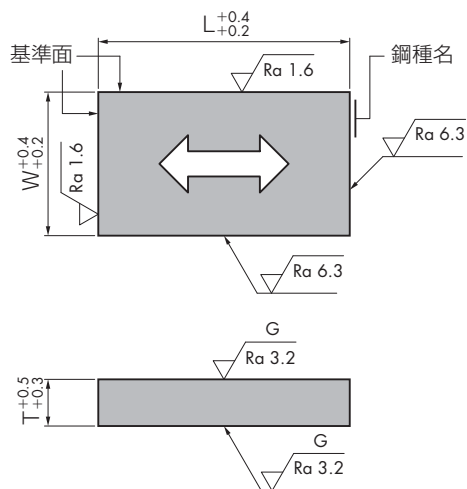

注) 素材の圧延方向が矢印の方向になるように材料取りがしてあります。

● 厚さ (T) の均一度……100mm につき 0.008

● T の両面の平面度 (100mm につき)

T	L	
	300 以下	300 を超え 500 以下
10	0.030	0.050
10 を超え 20 以下	0.020	0.030
20 を超え 35 以下	0.012	0.020

● 基準面の直角度……100mm につき 0.008

### 規格表

幅 W	長さ L	厚さ T						
		10	13	16	20	25	30	35
60	60	●	●	●	●	●		
	80	●	●	●	●	●		
	500	●	●	●	●	●		
80	80	●	●	●	●	●	●	
	100	●	●	●	●	●	●	
	125	●	●	●	●	●	●	
	150	●	●	●	●	●	●	
	500	●	●	●	●	●	●	
100	100	●	●	●	●	●	●	
	125	●	●	●	●	●	●	
	150	●	●	●	●	●	●	
	200	●	●	●	●	●	●	
	500	●	●	●	●	●	●	
125	125	●	●	●	●	●	●	
	150	●	●	●	●	●	●	
	180	●	●	●	●	●	●	
	200	●	●	●	●	●	●	
	500	●	●	●	●	●	●	
150	150	●	●	●	●	●	●	●
	180	●	●	●	●	●	●	●
	200	●	●	●	●	●	●	●
	250	●	●	●	●	●	●	●
	500	●	●	●	●	●	●	●
160	160		●	●	●	●	●	●
	200		●	●	●	●	●	●
	250		●	●	●	●	●	●
	500		●	●	●	●	●	●
180	180			●	●	●	●	●
	200			●	●	●	●	●
	250			●	●	●	●	●
	500			●	●	●	●	●
200	200			●	●	●	●	●
	250			●	●	●	●	●
	300			●	●	●	●	●
	500			●	●	●	●	●
250	250			●	●	●	●	●
	300			●	●	●	●	●
	500			●	●	●	●	●

納期

翌々日発送

注文方法

PP-ACD | 60×80×10 | 5

鋼種 | W | L | T | 枚数